

Email sales@airtarpsaustralia.com.au

HOOD TARP ORDER FORM

Customer: _____ Date: _____
 Address: _____ Phone: _____
 _____ Fax: _____

Contact: _____ Order No: _____ Email: _____

HOOD TYPE

- 60 % Quarry Spec
 - Mesh
 - PVC
- 80 % Waterproof –PVC
 - Roll up flap with ropes and rubber rings
- Asphalt Spec – Canvas (Black)

BODY TYPE

- Rigid Truck
- Dog Trailer
- Semi

Brand of Body: _____

TAILGATE

- Two Way Gate
- Forward Hinged
- Rear Top Hinged
- Other: _____

COLOUR SELECTION

(Circle one of the Following)

Mesh: Black, Maroon, Green, Red, Light/Dark Blue, Terracotta, Grey, HiVis Orange*, HiVis Green*

**Surcharge Applies*

PVC: Black, Red, White, Grey, Blue, Maroon, Green, Yellow

WIND OUT STYLE

- Shaft Driven (Dual Cable)
- Cable Driven (Single Cable)

BOW SELECTION



Quarry Bows

- 150 mm
- 350 mm
- 450 mm
- 500 mm

Excavation Bows

- 350 mm
- 450 mm
- 600 mm
- 300 mm*

**(Narrow Body 1900 – 2100mm)*

OPERATING REQUIREMENTS

Manual Shaft

Drive Method

- Belt Driven
- Chain Driven


Electric System

- 12 Volt
- 24 Volt
- Manual Override

Note: Please use other forms provided for Full Waterproof and/or Pull-out Tarp systems

REQUIRED DIMENSIONS

- A Inner Width Front _____
- B Inner Width Rear _____
- C Outer Width Front _____
- D Outer Width Rear _____
- E Total Length _____
- F Front of Body to Hinge _____
- G Side Height _____
- H Hoist Height above rail _____
- I Rear Post Width _____
- J Hoist Width at rail _____
- K Hoist Depth at rail _____
- L Hoist Top Width _____
- M Hoist Top Depth _____
- N Headboard Height _____
- Required Tarp Length _____
(From Front of Bin)

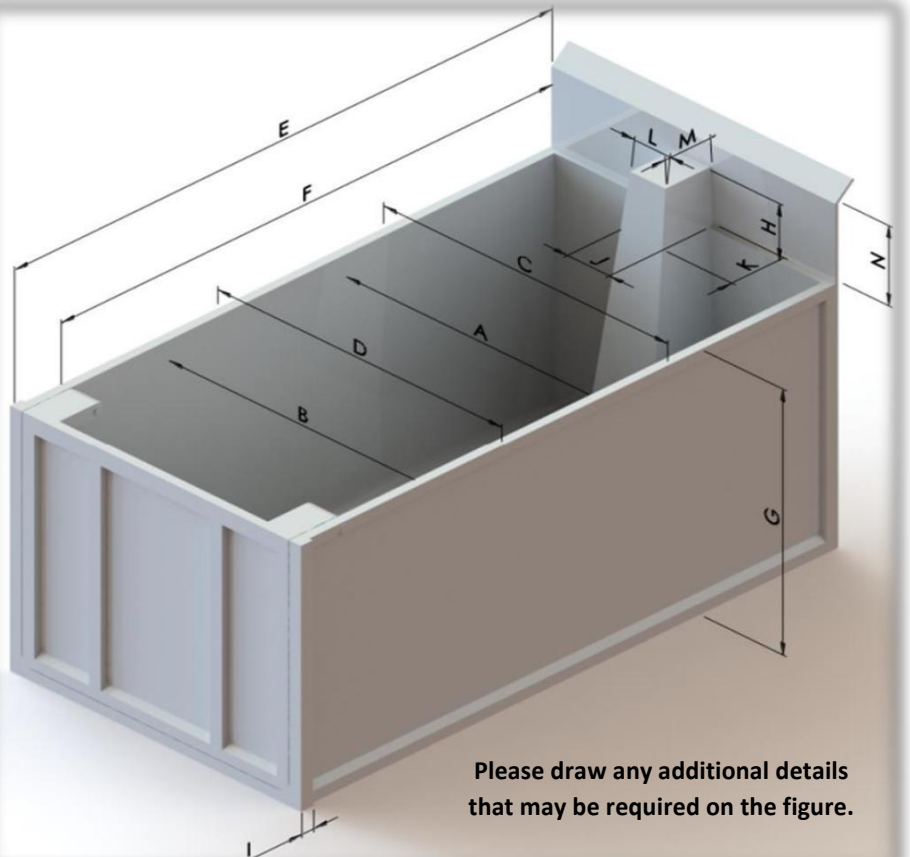

Please draw any additional details that may be required on the figure.